

## Original instructions

### Lithium-ion batteries

EXD 18  
EXU 16, EXU 18, EXU 20  
EXU-H

-



0153 0154 0155 0157 0161  
0162 0285 0294 0295 1180  
1182 1183 1184 1185 1186

first in intralogistics



## Address of manufacturer and contact details

STILL GmbH  
Berzeliusstraße 10  
22113 Hamburg, Germany  
Tel. +49 (0) 40 7339-0  
Fax: +49 (0) 40 7339-1622  
Email: [info@still.de](mailto:info@still.de)  
Website: <http://www.still.de>





<b>1</b>	<b>Introduction</b>	
	Introduction	2
	Information on the conformity of lithium-ion batteries	3
<b>2</b>	<b>Safety</b>	
	Special lithium-ion safety rules	6
	What to do in the event of incorrect use	7
	Personal protective measures following an incident	8
	What to do in the event of an accidental spillage	8
	Transporting a lithium-ion battery	10
	Scrapping lithium-ion batteries	11
<b>3</b>	<b>General views</b>	
	Differences between lithium-ion battery types	14
	Labels on the top of lithium-ion batteries	15
	Labels on the sides of lithium-ion batteries	16
<b>4</b>	<b>Use</b>	
	Checking the charge status	18
	Vertical access lithium-ion batteries: Connecting/disconnecting the battery connector	19
	Starting a truck equipped with a vertical access lithium-ion battery	20
	Side access lithium-ion batteries: Connecting/disconnecting the battery connector	21
	Commissioning a truck equipped with a side access lithium-ion battery	21
	Automatic battery shut-off	23
	Battery fitted with a compartment	23
	Display on a truck equipped with a lithium-ion battery	24
	Battery charging indicator	25
	Installing the external charger	27
	Charging lithium-ion batteries using an external charger	28
	Using the side socket to charge the battery	32
	Battery charging times	34
	Using the on-board charger	35

Vertical access battery: Changing the battery	38
Side access battery: Changing the battery	38
Battery error codes	39
Lithium-ion batteries: Long-term storage	40
<b>5 Maintenance</b>	
Maintenance plan for lithium-ion batteries	44
Chassis, bodywork and fittings	45
Cleaning the lithium-ion battery	45
Electrical equipment	46
Harnesses and cables	46
<b>6 Technical specifications</b>	
Lithium-ion battery weight precision	48

# Introduction

## Introduction

This supplement is specific to lithium-ion batteries. It complements the operating instructions. The latter describe the conditions for using the lithium-ion battery in the truck that you own. An Ion label affixed on the truck allows you to differentiate from trucks fitted with a Gel or Lead battery.

### **DANGER**

#### **Electrical risk**

Refer to the specific lithium-ion safety rules.

Lithium-ion elements and batteries are on the list of dangerous materials in accordance with

the United Nations recommendations on the transport of dangerous goods.

#### **The battery must not be opened.**

It must be stored in a cool, dry and ventilated place. High temperatures (above 40°C) reduce the battery life.

### **DANGER**

#### **There is a risk of fire, leakage or explosion**

Do not store lithium-ion batteries in bulk (risk of short circuit). Keep the battery in its original packaging until it is used.

Do not destroy or incinerate them.



## Information on the conformity of lithium-ion batteries

The manufacturer of the lithium-ion battery and Kion group provider declares that:

the lithium-ion battery

conforms with the provisions of the following EU directive **2004/108/EC**

in accordance with **EN 61000-6-2:2006** and **EN 61000-6-3:2007**.

This declaration of conformity with EC directives applies only to battery use that conforms to the recommendations described in the operating instructions.



2

---

**Safety**

## Special lithium-ion safety rules

## Special lithium-ion safety rules

**⚠ DANGER****There is a risk of fire.**

Have class D fire extinguishers or inert gas, carbon dioxide, powder or foam fire extinguishers near the zone in which the lithium-ion batteries are used.

**⚠ DANGER****Electrical danger**

Do not open the battery. Electrical risk.

Only the After-Sales Service Centre technicians can open the battery.

It is necessary to respect the following guidelines:

- Read the documents provided with the battery carefully.
- Only persons who have been trained to work with lithium-ion technology are permitted to work on the batteries (for example After-Sales Service Centre technicians).
- Do not place lithium-ion batteries on or near flames or hot heat sources ( $> 70^{\circ}\text{C}$ ). This may cause the batteries to overheat or burst into flames. This type of use also impairs the performance of the batteries and reduces their service life.
- Improper use may cause overheating or serious injury. Respect the following safety rules:
  - Never short circuit the battery terminals
  - Do not reverse the battery polarity
  - Do not open the battery

- Do not submit the battery to excessive mechanical constraints
- Do not expose the battery unit to humidity or water ( $> 95\%$ )
- Install the batteries in a Level 2 pollution zone in accordance with standard EN 60664-1
- Batteries must be installed in a room that can be easily ventilated in the event of incorrect use.
- The forklift operator must drive the truck carefully to avoid any risk of piercing or damaging the lithium-ion batteries.

**⚠ DANGER****Risk of injury**

In the event of an accident (shock, fall, collision), the battery may be damaged, pierced or deformed. Establish a 5-metre safety perimeter around the battery. Contact the emergency services and tell them that there is a lithium-ion battery fire. Contact the after-sales service department.

- Store strapped batteries on pallets. Do not store them too high to reduce any risk of falling. Do not store on the ground to reduce the risk of humidity and impacts. We recommend that batteries are stored at a height between 60 and 120 cm.
- If an unusual smell, change of shape or any other anomaly is observed during operation, immediately disconnect the battery (using either the emergency stop or the charger socket). Contact the after-sales service department. If necessary, also contact the emergency services and tell them that there is a lithium-ion battery fire.

## What to do in the event of incorrect use

Lithium-ion batteries present no chemical danger in the context of normal use. Batteries must not be opened or burned for example.

In the event of exposure to the internal components or of their being burned, follow these instructions.

### In the event of contact with eyes

The content of an open battery can cause eye irritation.

Dust is likely to cause inflammation of the eyelids.

- Rinse immediately and thoroughly with water for at least 15 minutes
- See a doctor as quickly as possible

### In the event of contact with skin

An open battery can lead to skin irritation and allergies.

- Remove contaminated clothes
- Rinse the parts of the skin affected thoroughly for at least 15 minutes
- Wash the skin using soap and water
- See a doctor if the irritation persists

### In the event of inhalation

An open battery can cause irritation of the respiratory tracts and mucous membranes or an allergic reaction.

During disassembly of the battery, a gas may be released and irritate the throat.

- Carry the person into the open air
- See a doctor as quickly as possible

### In the event of ingestion

- Rinse the mouth thoroughly with water
- Drink lots of water

- Do not make the person vomit
- See a doctor as quickly as possible

### In the event of a fire

If a fire breaks out, follow these instructions:

#### For a small fire:

- Use class D fire extinguishers or inert gas, carbon dioxide, powder or foam fire extinguishers
- Establish a safety perimeter of five metres around the battery
- Call the emergency services and tell them that it is a lithium-ion battery fire
- After extinguishing the fire, do not reuse the battery. Contact the after-sales service department.

#### For a large fire:

- Establish a safety perimeter of five metres around the battery
- Call the emergency services and tell them that it is a lithium-ion battery fire

Special fire-fighting procedures (intervention of firefighters):

- Firefighters must wear self-contained breathing apparatus
- Use an approved mask to avoid inhalation of toxic fumes
- Wear protective clothing and equipment to avoid accidental bodily contact with the electrolyte solution
- All the types of extinguishing agents given above can be used on the batteries
- Use a large amount of water to cool the outside of the batteries if they are exposed to fire to prevent them rupturing
- After extinguishing the fire, do not reuse the battery. Contact the after-sales service department.

## Personal protective measures following an incident

### DANGER

#### Electrical risk

Do not use water on connected batteries in the charging room.

### DANGER

#### Risk of explosion: release of gas that may create an explosive atmosphere

After extinguishing the fire, establish a safety perimeter of at least five metres around the battery.

### DANGER

#### Risk of release of toxic products

## Personal protective measures following an incident

### WARNING

Handle an open battery only in a well-ventilated place.

Respiratory protection	If an element is opened or if it leaks, use a gas mask covering the entire face and fitted with ABEK filters or self-contained breathing apparatus (escape mask-type). Firefighters must wear self-contained breathing apparatus.
Hand protection	Use polypropylene, polyethylene, rubber or Viton gloves to handle leaking or broken elements.
Eye protection	Wear safety goggles with side shields or a mask covering the face to handle leaking or broken elements.
Other	Wear a rubber apron and a protection suit to handle leaking or broken elements.

## What to do in the event of an accidental spillage

Take the following precautions in the event of leakage:

### Precautions for individuals

- Evacuate staff from the contaminated area until the vapours have dispersed
- Avoid inhaling the gas in the event of electrolyte leakage from an element or a battery
- Follow the instructions on **What to do in the event of incorrect use** if there is contact with

the skin or eyes, or if there is inhalation or ingestion

- Wear goggles and protective gloves

### Precautions for the environment

- Avoid pollution of wastewater, surface water and groundwater
- Avoid pollution of the soil and atmosphere
- Use absorbent materials (sand, earth) to absorb exudation

## What to do in the event of an accidental spillage

- Seal battery leakages
- Put the contaminated absorbent product in a plastic bag and dispose of it as special waste according to the local regulations in force

**⚠ DANGER****Environmental danger**

Do not reuse a lithium-ion battery that has leaked.  
Call the After-Sales Service Centre.

---

## Transporting a lithium-ion battery

### Transporting a lithium-ion battery

Before transporting any lithium-ion battery, check the current regulations on the transport of dangerous goods. Comply with these when preparing the packaging and transport. Train authorised staff to dispatch lithium-ion batteries.

#### NOTE

*It is recommended that the original packaging is kept for any subsequent dispatch.*

A lithium-ion battery is a special product. Special precautions should be taken when:

- Transporting a truck equipped with a lithium-ion battery
- Transporting only the lithium battery


A class 9 danger label must be affixed to the packaging for transport.

It is different if the battery is transported on its own or in a truck. An example of a label appears in this supplement. Refer to the latest current regulations before dispatch as the information might have changed since this supplement was written.

Special documents must be sent with the battery. Refer to the applicable standards or regulations.

#### NOTE

*Recharge the lithium-ion battery before transporting it taking account of the transport mode (plane, boat, road). Excessive discharge on arrival could damage the performance of the battery.*

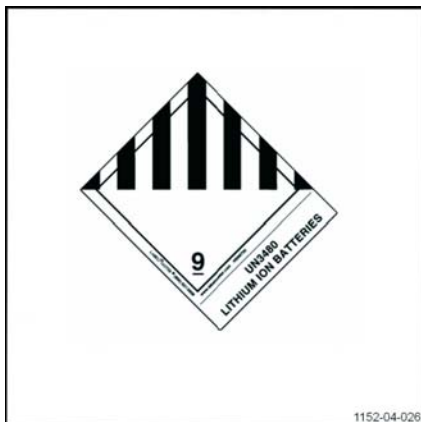



## Scrapping lithium-ion batteries



### ENVIRONMENT NOTE

*Comply with current regulations for scrapping batteries. Take care to minimise, as far as possible, any impact on the environment.*

Lithium-ion batteries must be sent to the collection centre to be recycled. Contact the After-Sales Service Centre to agree how to send them.

Apply the following main rules for transport:


- Make sure that the battery is discharged
- Affix the **Class 9** transport label on the battery
- Use packaging that complies with international regulations
- Use the original packaging, if possible. Use sturdy packaging capable of bearing the weight of the batteries. Store it in a dry place.
- Wedge the battery well in the packaging to prevent it moving during transport
- Pack batteries individually in plastic bags. Package them to prevent any risk of short-circuit between terminals.
- Identify the type and number of batteries on the outside of the packaging
- Do not store near to a heat source

## Scrapping lithium-ion batteries

## General views

## Differences between lithium-ion battery types


## Differences between lithium-ion battery types

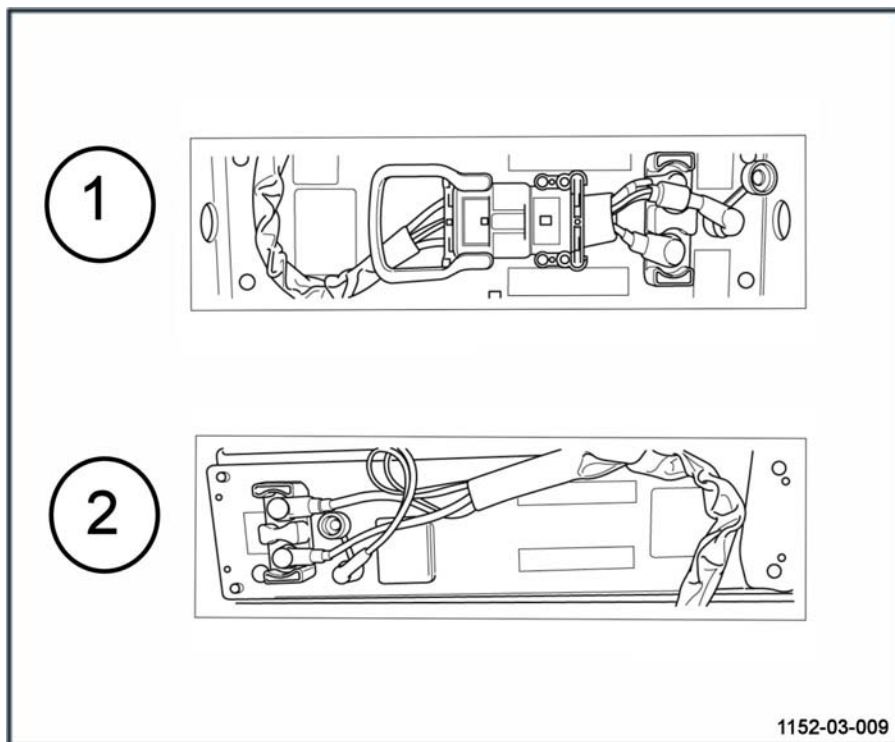

Battery type (1)	Dimensions				Nominal voltage (V)	Nominal capacity (Ah)
	Length (mm)	Height (mm)	Depth (mm)	Weight (kg)		
A1 (one module)	648	627	156	50.5	23.1	82
A2 (two modules)	648	627	156	70.5	23.1	164

Battery type (2)	Dimensions				Nominal voltage (V)	Nominal capacity (Ah)
	Length (mm)	Height (mm)	Depth (mm)	Weight (kg)		
B1 (one module)	718	618	210	108	23.1	205
B2 (two modules)	718	618	210	139	23.1	410

## Labels on the top of lithium-ion batteries

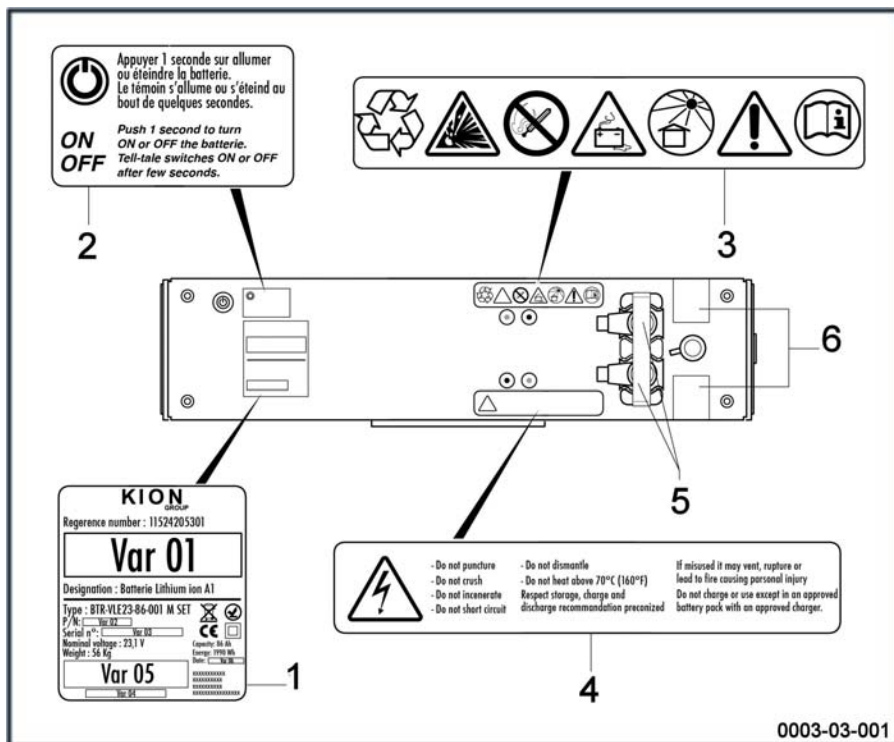

- 1 Identification label
- 2 How to switch on the battery label
- 3 Recommendation pictograms label

- 4 High Voltage label
- 5 + and - poles on the terminal board
- 6 Tamper-proof label




### NOTE

*This illustration shows the location of labels on the A1 and A2 batteries. The positioning is slightly different on the B1 and B2 batteries.*

## Labels on the sides of lithium-ion batteries

## Labels on the sides of lithium-ion batteries

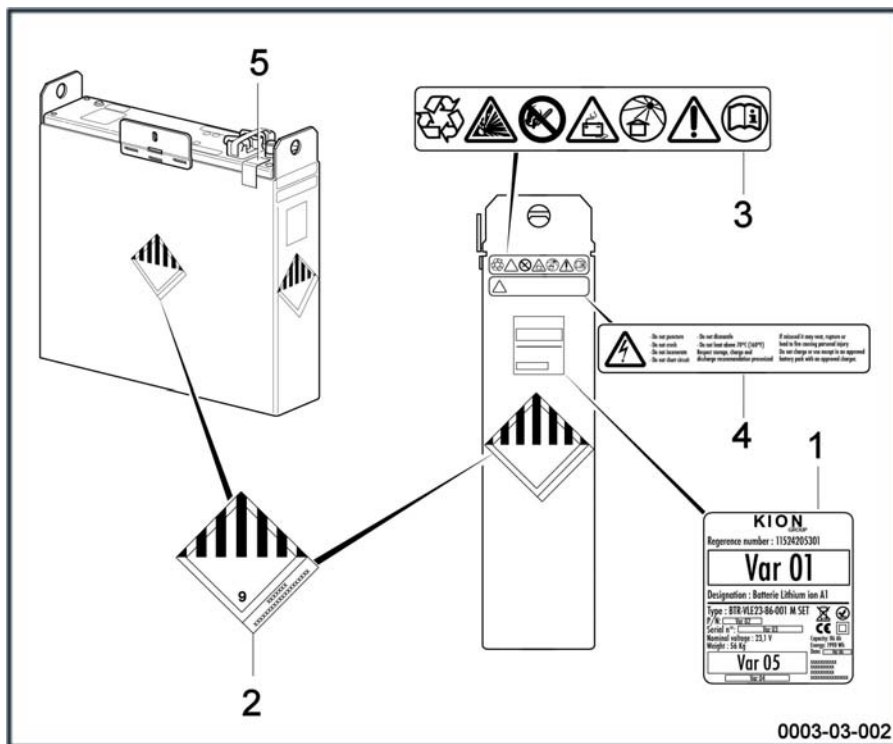

- 1 Identification label  
 2 Transport label (check the regulations in force in your country)

- 3 Recommendation pictograms label  
 4 High Voltage label  
 5 Tamper-proof label

**NOTE**

*This illustration shows the location of labels on the A1 and A2 batteries. The positioning is slightly different on the B1 and B2 batteries.*

4

---

Use

## Checking the charge status

## Checking the charge status

**⚠ DANGER****Electrical danger**


The battery must be charged and serviced in accordance with the instructions provided with the battery and the external charger.

- Before using the truck, check that the battery is correctly charged
- Switch on the battery (see Chapter 4: Starting a truck equipped with a lithium-ion battery)
- Connect the battery connector
- Depending on the model selected, turn the switch key (2) or enter the PIN code on the electronic key
- Check the battery charge on the display screen (1)

**⚠ WARNING**

Improper use of the battery may cause it to become excessively or completely discharged. This may damage the battery or render it unusable.

If this is the case, do not recharge the battery. It is essential to contact the After-Sales Service Centre.

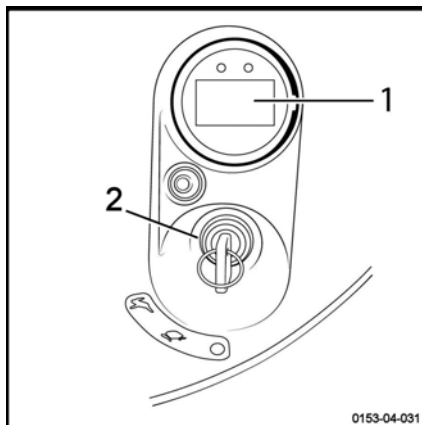



## Vertical access lithium-ion batteries: Connecting/disconnecting the battery connector

### **WARNING**

Electrical risk

Regularly check the condition of the contacts of the connectors.

Each ½ connector has a polarising pin. Ensure the polarising pin is present and in good condition. They prevent the risk of reverse polarity.


### Disconnecting the battery connector

- Secure the truck.
- Turn off the ignition and remove the key.

There are two different ways to disconnect the battery. It is up to the operator to choose which one to use.

- Pull the emergency stop handle (1) upwards to disconnect it. The emergency stop handle (1) is located at the front of the truck.
- Alternatively, open the cover of the battery compartment. Next, disconnect the battery connector (2).

It is not necessary to turn off the lithium-ion battery once the battery has been disconnected.

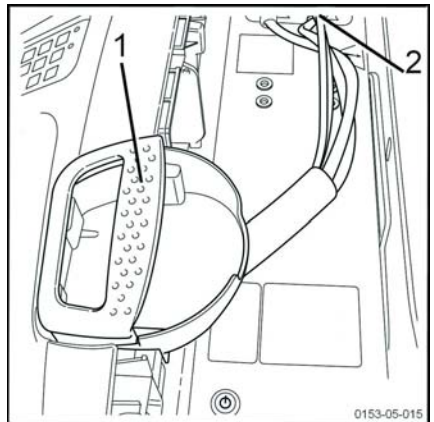

### Connecting the battery connector

Check if the operator has disconnected the battery connector (2) or the emergency stop handle (1).

- Press the emergency stop handle (1) into the fixed socket on the truck.
- Alternatively, reconnect the battery connector (2).

## Starting a truck equipped with a vertical access lithium-ion battery


### Starting a truck equipped with a vertical access lithium-ion battery

#### NOTE

*Do not connect any additional electrical devices on the truck. Contact the After-Sales Service if you want to add additional devices.*

To commission a truck equipped with a vertical access lithium-ion battery, proceed as follows:

- Open the cover of the battery compartment

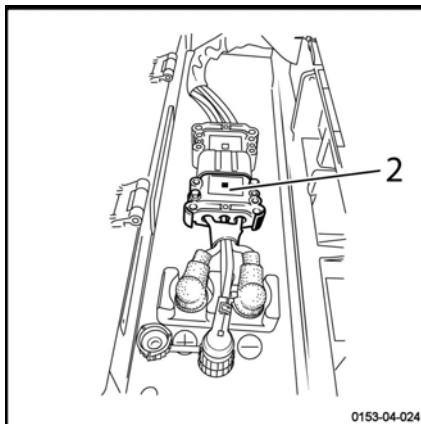


- Connect the truck battery connector (2)
- Turn on the battery To this end, check that the green indicator light (1) is on

If the green indicator light is on, the battery is functioning.

If the green indicator light is off, the battery is not turned on. Press the button for **one second**. Wait until the button lights up. The indicator light will then turn bright green.

- Close the battery compartment cover.
- Turn the truck off by turning the key or by typing in the PIN on the digicode.

The truck is ready for operation.

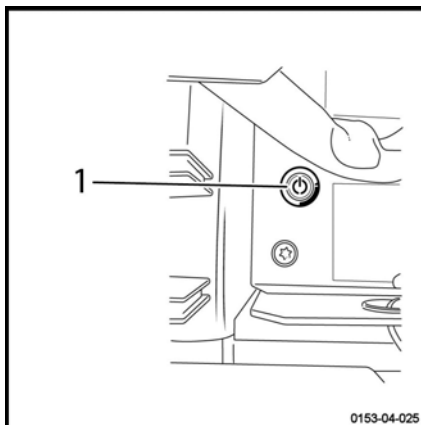

### Switching off the truck

- Turn the key or press and hold the # button on the digicode.

#### NOTE

*It is not necessary to turn off the battery. If the truck is not used for a certain period of time, the battery is automatically turned off. This period of time is normally 24 hours. It can be configured. Contact the After-Sales Service to configure this. If you want to turn it off, simply press on the button for **one second**. Wait for the button to turn off.*

## Side access lithium-ion batteries: Connecting/disconnecting the battery connector

### WARNING

Electrical risk.

Regularly check the condition of the contacts of the connectors.

Each ½ connector has a polarising pin. Ensure the polarising pins are present and in good condition. They prevent any risk of reverse polarity.


### Disconnecting the battery connector

- Immobilise the machine.
- Switch off the ignition and remove the key.
- Pull the emergency stop handle (2) upwards to disconnect it. The emergency stop handle (2) is located at the front of the truck.

It is not necessary to switch off the lithium-ion battery once the battery connector has been disconnected.

### Connecting the battery connector

- Press the emergency stop handle (2) into the fixed socket on the truck.

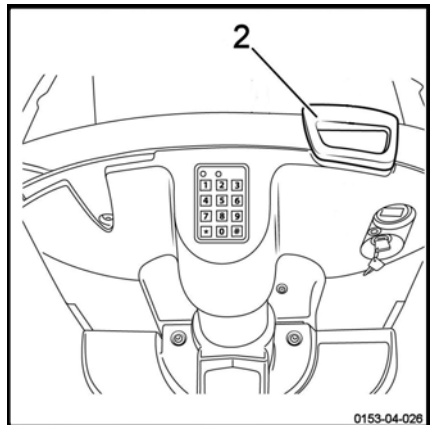

## Commissioning a truck equipped with a side access lithium-ion battery




### NOTE

*Do not connect any additional electrical devices to the truck. Contact the After-Sales Service if you want to add additional devices.*

To commission a truck equipped with a side access lithium-ion battery, proceed as follows:

- Connect the truck battery connector (2).

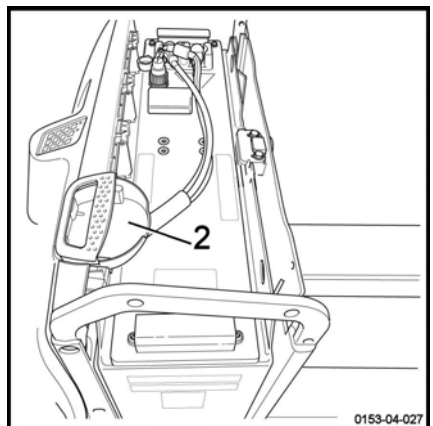

## Commissioning a truck equipped with a side access lithium-ion battery


- Open the cover of the battery compartment. ▷
- Switch on the battery. To this end, check that the green indicator light (1) is on.

If the green indicator light is on, the battery is functioning.

If the green indicator light is off, the battery is not switched on. Press the button for **one second**. Wait until the button lights up. The indicator light will then turn bright green.

- Close the battery compartment cover.
- Switch on the truck by turning the key or by entering the PIN on the electronic key.

The truck is ready for operation.

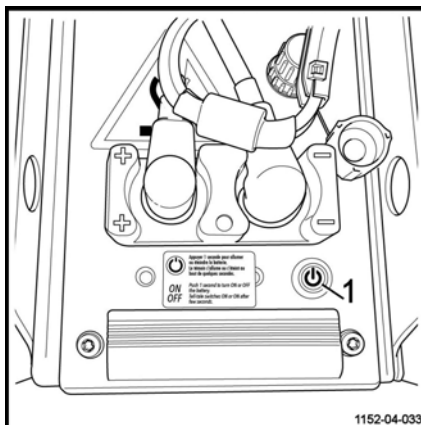

### Switching off the truck

- Turn the key or press and hold the # button on the electronic key.



#### NOTE

*It is not necessary to switch off the battery. If the truck is not used for a certain period of time, the battery is automatically switched off. This period of time is normally 24 hours. It can be configured. Contact the After-Sales Service to configure this. To switch off the battery, simply press on the button for **one second**. Wait for the button to turn off.*

## Automatic battery shut-off

It is not necessary to switch off the battery. If the truck is not used for a certain period of time, the battery is automatically switched off.

This period of time is normally 2 hours and 5 minutes. It can be configured.

Contact the After-Sales Service to configure this.

When the battery is switched off, simply pressing the button for one second will switch it back on.

## Battery fitted with a compartment


In some cases, the lithium-ion battery can be placed in a battery compartment (2).

The battery is attached to the compartment using a mounting (1).

The specification and operation of the battery are exactly the same with or without a compartment.

**It is prohibited to remove the battery from the compartment and loosen the mounting.**

If the battery is faulty, please contact the After-Sales Service Centre.

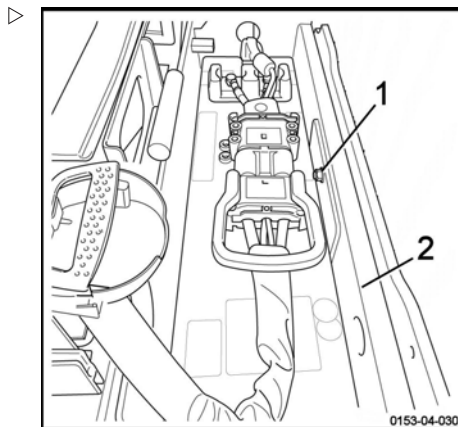


## Display on a truck equipped with a lithium-ion battery

### Display on a truck equipped with a lithium-ion battery


A truck equipped with a lithium-ion battery has a specific display (1).

It is recognisable by its white screen.

The other functions are identical to the standard display.

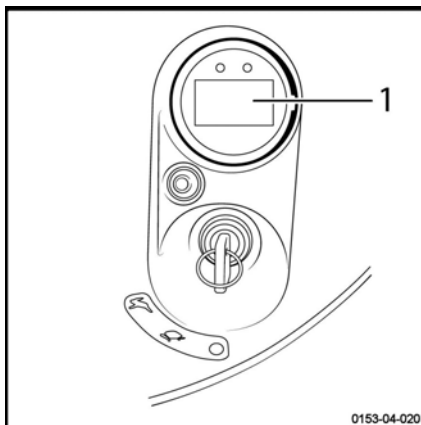

## Battery charging indicator

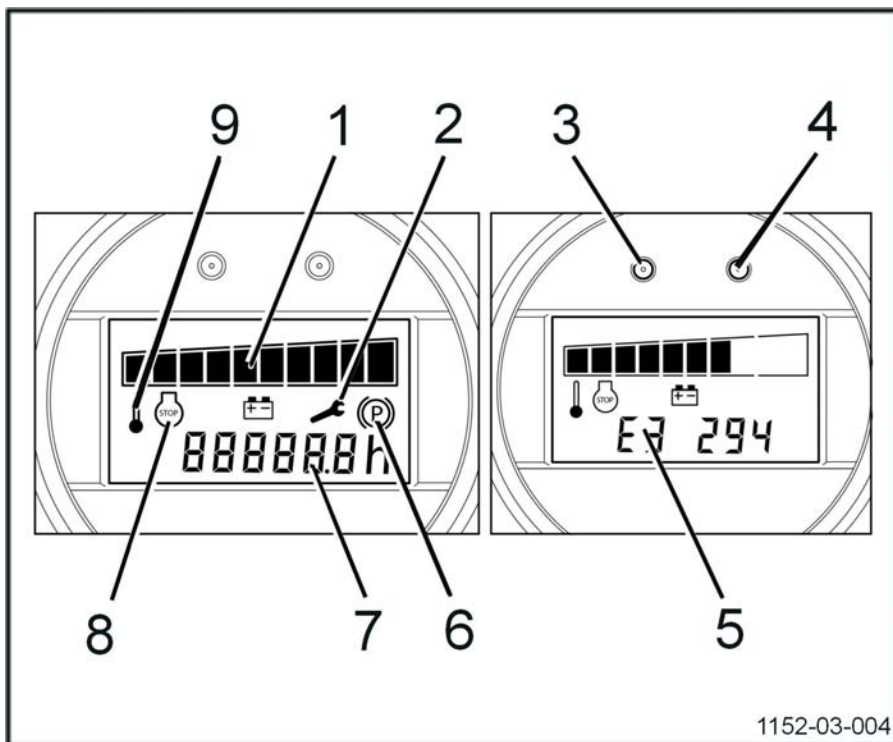

1152-03-004

	DESCRIPTION	EXPLANATION	COMMENTS/SCREEN MESSAGES
1	Battery charge level represented by 10 bars	Full charge: 100% Low charge: 10% Discharged: 0%	91%–100%: 10 bars 1%–10%: 1 bar 0%: 1 flashing bar
1	Battery charge level		From 5% to 2%: reduction of traction speed. From 6 km/h at 5% charge to 2 km/h at 2% charge. From 2% to 0%: initial lift off and speed limited to 2 km/h. 0%: truck stopped.
2	Maintenance alarm (red)	1) Flashing: less than 50 hours' truck operation until the next service 2) Constant: service date overdue	
3	Red indicator light	Switched on: fault or alarm	

## Battery charging indicator

	DESCRIPTION	EXPLANATION	COMMENTS/SCREEN MESSAGES
3	Red indicator light	Flashing	Battery needs charging to 100% Causes: The battery has not been charged for a week and its charge level is below 90%
4	Green indicator light	Switched off: truck switched off Switched on: truck switched on	
5	Error code	E3 294	These codes will help the After-Sales Service Centre to decide on the appropriate response from the service engineer.
6	Fault or brake wear (air gap)		Do not operate the truck.
7	Hour meter	Indicates the number of operating hours of the machine	<ul style="list-style-type: none"> <li>- The meter starts running when the machine is switched on and a control is used.</li> <li>- When counting, the dot next to the tenths of an hour flashes.</li> <li>- The hour meter displays hours and tenths of an hour.</li> <li>- When the power supply is cut, the hours are stored in the memory.</li> </ul>
8	STOP alarm (red)	Miscellaneous problems	Do not operate the truck.
9	T° alarm (red)	Constant: control module overheating	-> Truck is stopped In general, wait a few minutes and then continue.



## Installing the external charger

The lithium-ion battery must be recharged only with a special charger.

Do not use a charger other than the one provided by the Kion group.

The temperature of the room where the charger is installed must be between 5° and 45°C. The humidity level must be below 95%.

The following wall chargers are available:

- An external wall charger
- An external charger that stays on the ground  
This is heavier

The vertical access and the side access lithium-ion batteries can be recharged with both types of external chargers.

### **DANGER**

#### **Electrical danger**

The charger must be installed and maintained only by electrical engineers or qualified staff.

### **DANGER**

#### **There is a risk of fire.**

The charger must be installed in a room without any inflammable elements.

### **WARNING**

Avoid the charger overheating.

Do not obstruct the air vents. The air must be able to circulate correctly.

Do not install the charger near a heat source or in a place exposed to direct sunlight.

Do not install it in an area that is subject to excessive dust or shocks or mechanical vibrations.

## Charging lithium-ion batteries using an external charger

### Charging lithium-ion batteries using an external charger

Read the information in the documentation provided with the charger.

It provides information on:

- the various charger screens
- possible error messages
- precautions for use.

#### ⚠ CAUTION

Risk of damage to the battery

It is essential to use the charger supplied with the battery for charging lithium-ion batteries.

#### ⚠ DANGER

##### Electrical danger

Do not touch the lithium-ion battery when it is charging and do not wear rings or jewellery. Do not place metal objects on or near the battery. Do not light a naked flame in the vicinity of the charging zone or near charging batteries.

#### ⚠ WARNING

Risk of sparks

Always connect the battery connector before switching on the battery charger and disconnect the connector after switching off the charger.

#### ⚠ WARNING

Risk of damage to the battery

It is important to charge the lithium-ion battery fully at least once a week.


The LED located on the display flashes red. You must therefore recharge the battery to 100%.

### Charging the vertical access lithium-ion battery using an external charger

#### ⚠ CAUTION

Risk of damage to the battery


It is essential not to switch off the lithium-ion battery during charging.

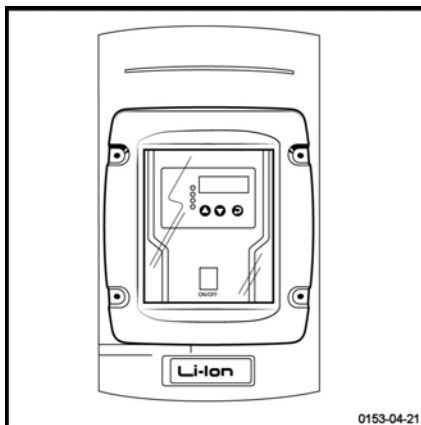


## Charging lithium-ion batteries using an external charger

To recharge the lithium-ion battery, proceed as follows:

- Park the truck close to the charging station.
- Secure the truck. Lower the fork arms.
- Switch off the ignition (2).

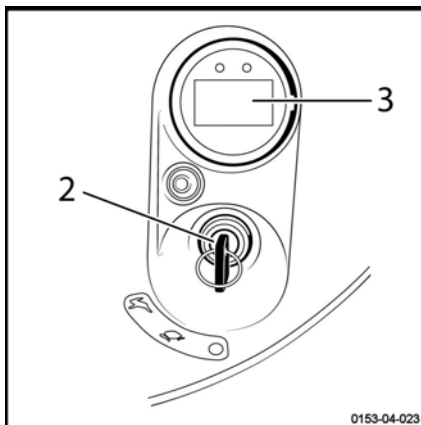

- Open the battery compartment cover.
- Unplug the battery connector (1).
- Plug the socket of the charging station into the connector (1) located on the battery.
- Switch the charger on as directed in the specific instructions for the charger. A screen appears displaying the words **Battery connected**. Charging the battery is automatically managed by the on-board electronics of the battery.
- When charging is complete and the charger has stopped, unplug the charger.

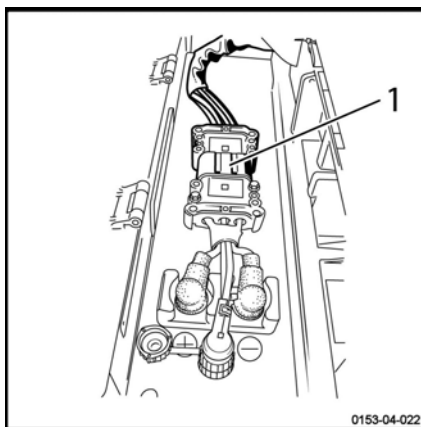**NOTE**

*It is possible to stop charging before the end of the complete cycle. The operator can resume work more quickly. It is advisable to recharge the battery after each use if possible. The battery charge percentage is indicated on the display screen. The charging time is indicated on the screen of the charger.*

- Reconnect the battery connector (1) on the truck.
- Then close the battery compartment cover.

## Charging lithium-ion batteries using an external charger

- Switch on the ignition (2) and check the charging status of the truck on the display (3).

The truck is now ready for use.

**If the charger stops before charging is complete**, follow these steps:

- Press the UP button for five seconds.

The charger will stop charging. The external charger display shows the following message:

**Manual Stop.**

- Reconnect the battery connector (1) on the truck.
- Then close the battery compartment cover.
- Return the truck to service.

## Charging the side access lithium-ion battery using an external charger


### ⚠ CAUTION

Risk of damage to the battery

It is essential not to switch off the lithium-ion battery during charging.

To recharge the lithium-ion battery, proceed as follows:

- Park the truck close to the charging station.
- Secure the truck. Lower the fork arms.
- Switch off the ignition (2) (key or electronic key).
- Pull the emergency stop handle to disconnect the battery connector (1).

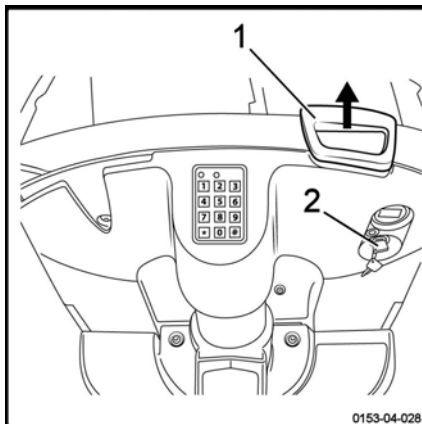

## Charging lithium-ion batteries using an external charger

- Plug the socket of the charging station into the connector (3) located in the technical compartment. ▷
- Switch the charger on as directed in the specific instructions for the charger. A screen appears displaying the words **Battery connected**. Charging the battery is automatically managed by the on-board electronics of the battery.
- When charging is complete and the charger has stopped, unplug the charger.

**NOTE**

*It is possible to stop charging before the end of the complete cycle. The operator can resume work more quickly. It is advisable to recharge the battery after each use if possible. The battery charge percentage is indicated on the display screen. The charging time is indicated on the screen of the charger.*

- Reconnect the emergency stop connector (1) to the truck.
- Switch on the ignition (2) (key or electronic key) and check the charging status of the truck on the display.


The truck is now ready for use.

**If the charger stops before charging is complete**, follow these steps:

- Press the UP button for five seconds.

The charger will stop charging. The external charger display shows the following message: **Manual Stop**.

- Reconnect the battery connector (1) on the truck.
- Then close the battery compartment cover.
- Return the truck to service.

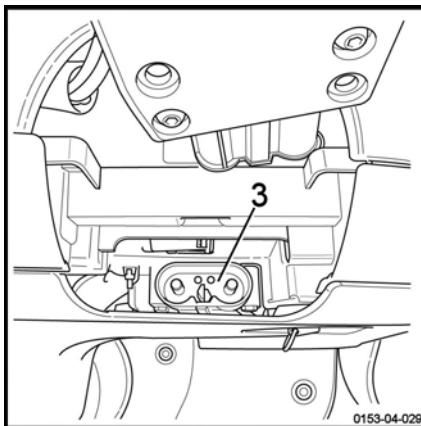

## Using the side socket to charge the battery

### Using the side socket to charge the battery

A side socket (1) can be installed on the battery on the side of the truck. The socket allows you to charge the battery without removing the battery connector (emergency stop handle) of the truck.

#### ⚠ CAUTION

Risk of damage to the battery

It is essential not to switch off the lithium-ion battery during charging.

#### ⚠ CAUTION


Risk of damage to the battery

Do not connect two external chargers to charge the battery. The operator must use either the side socket or the truck socket (emergency stop handle) for charging.

Proceed as follows:

- Park the truck close to the charging station.
- Immobilise the machine. Lower the fork arms.
- Switch off the ignition (key or electronic key).
- Disconnect any additional electrical equipment before charging. Charging cuts off the electrical supply to the truck and to additional equipment.
- Plug the connector of the charging station into the side socket (1) located on the side of the truck.
- Switch the charger on as directed in the specific instructions for the charger. A screen appears displaying the words **Battery connected**. Charging of the battery is automatically managed by the on-board electronics of the battery.

A green LED (2) lights up. The LED indicates that the connector of the side socket (1) is correctly inserted and that charging is in progress.

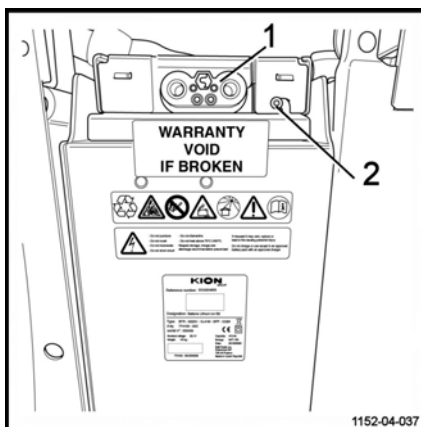

**NOTE**

*If the LED remains off, the connector is not detected. Please contact the After-Sales Service Centre.*

- When charging is complete and the charger has stopped, unplug the charger.

**NOTE**

*It is possible to stop charging before the end of the complete cycle. The operator can resume work more quickly. It is advisable to recharge the battery after each use if possible. The battery charge percentage is indicated on the display screen. The charging time is indicated on the screen of the charger.*

- Switch on the ignition (key or electronic key) and check the charging status of the truck on the display.

The truck is now ready for use.

**CAUTION**

Risk of damage to the side socket

The side socket is intended only for charging the battery.

If the socket is faulty, please contact the After-Sales Service Centre.

## Battery charging times

### Battery charging times

The charging time for lithium-ion batteries depends on the charger used. There are two types of chargers.

The charging times indicated in the table are provided for information only. They correspond to a complete battery recharge (from 0% to 100%).

	Battery A1 – 82 Ah BS vertical access compartment		Battery A2 – 164 Ah BS vertical access compartment		Battery B1 – 205 Ah 2 PzS side access compartment		Battery B2 – 410 Ah 2 PzS side access compartment	
	25°C	0°C	25°C	0°C	25°C	0°C	25°C	0°C
Wall charger V90 (single phase, 90 A)	1 hr 30	4 hrs 30	2 hrs 10	4 hrs 50	2 hrs 40	5 hrs	5 hrs 10	5 hrs 10
Wall charger V160 (three phase, 160 A)	1 hr 30	4 hrs 30	1 hr 40	4 hrs 50	1 hr 50	5 hrs	3 hrs	5 hrs 10
Wall charger V225 (three phase, 225 A)	1 hr 30	4 hrs 30	1 hr 40	4 hrs 50	1 hr 40	5 hrs	2 hrs 20	5 hrs 10



#### NOTE

*These charging times may increase if:*

- *The battery is stored at a low temperature before recharging*
- *The battery is not fully charged (100%) at least once a week*



## Using the on-board charger

### CAUTION

Precautions for installation and use

- The electric installation must comply with the standard applicable in your country.
- The electric wall socket must be a 2-pole + earth 16-A, 230-V type socket that is correctly connected and protected.
- Before charging, check the condition of the connections and cables, and retighten as required.
- Charging must be carried out in an area where there is no condensation or pollution and there is sufficient ventilation.
- The charger must not be exposed to oil, grease or other similar substances.
- Charging must be carried out with the truck stopped.

Thanks to the on-board charger, it is no longer necessary to use a charging room. In fact, this charger can be connected to any 2P+T, 230-V, 16-A socket.

However, before charging in this way, it is necessary to ensure that the location selected for charging satisfies all of the safety requirements.



### NOTE

*This charger is compatible with lithium-ion batteries recommended by the truck's manufacturer.*

The charger is designed:

- To be incorporated in the truck
- To remain permanently connected to the battery
- To operate in all positions
- To remain connected to the mains during periods of truck downtime to ensure the availability of the machine

### CAUTION

Risk of damage to the equipment.

Do not disconnect the battery connector during charging (green indicator light flashes).

The truck cannot be operated during charging.

## Using the on-board charger


The on-board charger is intended to recharge the battery.

- Switch off the truck.

Do not pull the emergency stop handle. This operation cuts off the circuits and stops the battery from charging.

- Connect the charger plug to a mains wall socket.

Phase	Green LED	Red LED
Mains socket disconnected	Off	Off
Charging phases	Flashing	Off
Stopped-/Equalisation/Maintenance phase	Continuously lit	Off
Battery warning	Off	Continuously lit
Charger polarity reversed (+bat and -bat charger cables reversed, with the battery remaining normally connected to the truck assembly)	Continuously lit	Continuously lit
Battery polarity reversed	Off	Off
Selector in neutral position or charger error	Flashing	Flashing
Battery alarm or errors	Off	Flashing
Communication problem	Flashing	Continuously lit

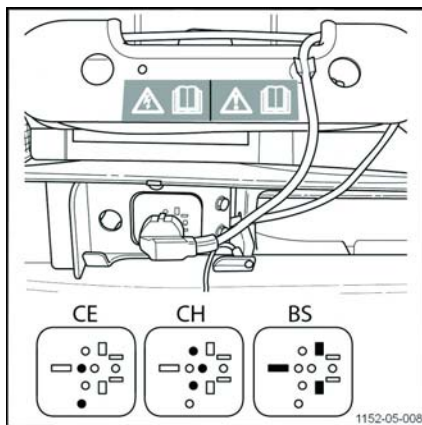

**⚠ CAUTION**

Risk of damage to the equipment.

It is strictly prohibited to use an on-board charger other than the one recommended.

**⚠ CAUTION**

Risk of damage to the mains cable resulting in electric shock and/or burns!

Park the truck sufficiently close to the mains wall socket to ensure that the mains cable on the on-board charger is not taut when connected and charging.

**⚠ CAUTION**

Risk of damage to the mains cable due to frequent operator handling. Risk of electric shock and/or burns!

The mains cable must be checked regularly as part of periodic statutory checks and maintenance operations.

**Adjusting the on-board charger**

- When the truck is delivered with its battery, the charger settings are adjusted in the factory.
- When the truck is delivered without its battery, the settings must be adjusted by a qualified technician when the truck is used for the first time.

If the battery is changed during the service life of the truck, make sure that the charger settings correspond to the new battery type. Any modification to the settings must be carried out by a qualified technician.

## Vertical access battery: Changing the battery

### Vertical access battery: Changing the battery

It is not possible to change the vertical access lithium-ion battery.

If the vertical access lithium-ion battery is faulty, please contact the After-Sales Service Centre.


Only After-Sales Service Centre technicians are authorised to change the lithium-ion battery.

**The mounting (1) of the lithium-ion battery must be checked regularly.**



#### NOTE

*There is a ballast plate at the bottom of the battery container. It is essential to leave this in place and not to move it. This plate is necessary and ensures the stability of the truck.*

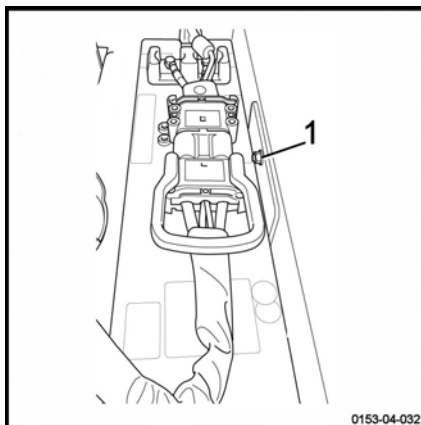

### Side access battery: Changing the battery

It is not possible to change the side access lithium-ion battery.

If the side access lithium-ion battery is faulty, please contact the After-Sales Service.


Only After-Sales Service technicians are authorised to change the lithium-ion battery.

**The mounting (1) of the lithium-ion battery must be checked regularly.**

#### WARNING

If the mounting is loose, the battery can be dislodged from its compartment.

If in doubt, please contact the After-Sales Service Centre.

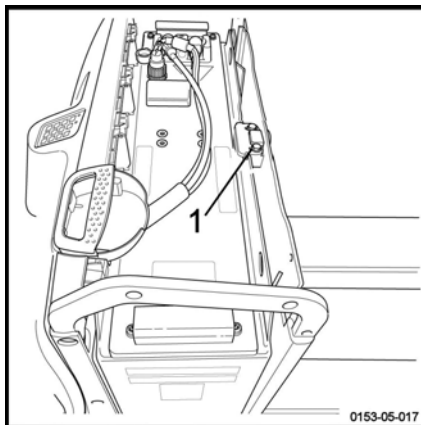

## Battery error codes

Some errors require only a reset by pushing the ON/OFF button for more than ten seconds.

The user does this first handling.

If the error persists, contact the After-Sales Service Centre.

## Lithium-ion batteries: Long-term storage

# Lithium-ion batteries: Long-term storage

### DANGER

#### Electrical danger

We recommend that batteries are stored at a height between 60 and 120 cm.

Remain extremely vigilant when manoeuvring to avoid piercing the batteries.

Special precautions should be taken when storing lithium-ion batteries.

- Store the battery in a dry place at a temperature between 0 and 40° to preserve its service life. This area must not be hermetically sealed to allow air renewal.
- Indicate the storage area. Access should be strictly limited to personnel who are aware of the risks and safety instructions.
- It is strongly advisable to recharge the battery fully before storing it.
- Batteries can be stored for a maximum period of 12 months if they are fully charged (100%).
- Check the battery charge level regularly. Do this at least every three months to maintain the charge level above 30%. Recharge the battery if necessary.
- Completely recharge the battery every three months to avoid impairing the performance of the battery.
- Recharging could take up to 24 hours.

### CAUTION

A battery that has reached an excessively low level cannot be recharged.

Contact your After-Sales Service immediately.

Precautions should be taken if the truck must not be used for a reasonably long period. The operations depend on the length of time it is unused.

## Storage of trucks for a period of less than two months

If the truck is not used for a period of up to two months, it is necessary to perform certain operations:

- Clean the truck carefully.
- Check the hydraulic oil level and refill if necessary.
- Coat any unpainted metal parts with a thin layer of oil or grease.
- Grease all hinges and joints.
- Spray contacts with a suitable aerosol product.
- Place the truck on chocks to avoid the tyres becoming flat.
- Cover the truck with a cotton cover to protect it from dust. Avoid using a plastic sheet.

## Long-term truck storage

The following work must be carried out on the truck to prevent corrosion if it needs to be stored for a long period of time. If the truck is to be stored for more than two months, it must be positioned in a clean and dry area. The area must be well-ventilated with no risk of freezing.

The following operations must be performed:

- Clean the truck carefully.
- Check the hydraulic oil level and refill if necessary.
- Coat any unpainted metal parts with a thin layer of oil or grease.
- Grease all hinges and joints.
- Recharge the lithium-ion battery every 3 months. Please observe the above instructions.
- Spray contacts with an aerosol product designed for contacts.

- Raise and chock the truck: the wheels must not touch the ground in order to prevent irreversible deformation of the tyres.
- Cover the truck with a cotton cover to protect it from dust.

#### **⚠ CAUTION**

We recommend that you do not use a plastic sheet as this encourages condensation to form.

Consult the After-Sales Service for further measures to take if the truck must be stored for a longer period of time.

### **Recommissioning after storage**

If the truck has been stored for more than six months, it must be checked carefully before being recommissioned. This check is similar to the workplace accident prevention inspection. It is therefore necessary to check

### **Lithium-ion batteries: Long-term storage**

all points and devices that are important for truck safety.

Carry out the following operations:

- Clean the truck carefully.
- Grease all hinges and joints.
- Check the battery charge status and recharge the battery if necessary.
- Check that there are no traces of condensation water in the hydraulic oil. Drain if necessary.
- Carry out the same maintenance work as for the first time it was commissioned.
- Commission the truck.
- In particular, check the following during start-up:
  - traction, control and steering
  - brakes (service brake and parking brake).

## Lithium-ion batteries: Long-term storage



**5**

---

## **Maintenance**

## Maintenance plan for lithium-ion batteries

## Maintenance plan for lithium-ion batteries

Lithium-ion batteries do not require any specific maintenance. However, it is necessary to perform some maintenance operations. These operations are in addition to the standard service plan for the truck.

<b>As required</b>
Clean the battery
Check the battery connections and sockets
Fully charge the battery at least once a week
Check the tightness of the battery terminal. Retighten to the correct torque if necessary
(For the vertical access battery only) Check the tightness of the battery mounting plate screw on the battery compartment. Retighten to the correct torque if necessary
(For the side access battery only) Check the tightness of the battery mounting plate screw on the battery compartment. Retighten to the correct torque if necessary
<b>Maintenance operations every three months</b>
<b>Battery</b>
Fully recharge the battery if it is in the storage area in or out of the truck
<b>Maintenance operations every 1000 hours, but at least every 12 months</b>
<b>Battery</b>
Visually check the battery

## Chassis, bodywork and fittings

### Cleaning the lithium-ion battery

#### **⚠ DANGER**

##### **Electrical danger**

Do not open the battery.

Lithium-ion batteries do not require any specific maintenance. However, it is advisable to clean it regularly depending on its use.

#### **⚠ CAUTION**

Always switch off the battery before working on an electrical component.

- Immobilise the truck.
- Lower the forks.
- Turn off the ignition and remove the key.
- Pull the emergency stop handle.
- Open the battery compartment cover.
- Switch off the battery using the button (1).
- Blow compressed air into the battery to remove dust and impurities.

#### **⚠ WARNING**

It is advisable to wear industrial goggles and a mask.


- Check the condition of the terminals.

#### **⚠ DANGER**

##### **Electrical danger**

Do not wear jewellery or metal objects.

- Switch on the battery.
- Close the battery compartment cover.
- Restart the truck.

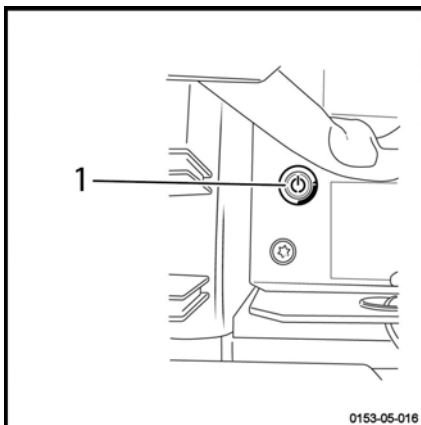

## Electrical equipment

## Electrical equipment

### Harnesses and cables

**⚠ DANGER****Risk of short circuit**

Do not use cables or harnesses other than those provided with the lithium-ion battery that was sold to you.

Using the cables provided with the vertical access lithium-ion battery with a side access lithium-ion battery is strictly forbidden.

Using the cables provided with the side access battery with a vertical access battery is also strictly forbidden.

A short circuit may occur and damage the cable harness and the connector.

## Technical specifications

## Lithium-ion battery weight precision

### Lithium-ion battery weight precision

The lithium-ion battery can be installed in a ballast box by the manufacturer if necessary.

The battery weight indicated on the identification label takes into account:

- The lithium-ion battery weight
- The weight of the battery ballast box if applicable

**A**

Address of manufacturer .....	I
Automatic battery shut-off .....	23

**B**

Battery charge status .....	18
Battery charging indicator .....	25
Battery charging times .....	34
Battery error codes .....	39
Battery fitted with a compartment .....	23

**C**

Changing the side access lithium-ion battery .....	38
Changing the vertical access lithium-ion battery .....	38
Connecting/disconnecting the battery connector .....	19, 21
Contact details .....	I

**D**

Differences between lithium-ion battery types .....	14
Display .....	24

**H**

Harnesses and cables .....	46
----------------------------	----

**I**

In the event of a fire .....	7
In the event of contact with eyes .....	7
In the event of contact with skin .....	7
In the event of ingestion .....	7
In the event of inhalation .....	7
Incorrect use .....	7
Information on the conformity of lithium-ion batteries .....	3
Installing the external charger .....	27

**L**

Labels on the sides of lithium-ion batteries .....	16
Labels on the top of lithium-ion batteries .....	15

**Lithium-ion batteries**

Lithium-ion batteries: Long-term storage .....	40
--	----

**Lithium-ion battery**

Charging lithium-ion batteries using an external charger .....	28
Charging using an external charger .....	28, 30
Cleaning the lithium-ion battery .....	45
Maintenance plan for lithium-ion batteries .....	44

Lithium-ion battery weight precision .....	48
--	----

**O****On-board charger**

Adjusting the on-board charger .....	37
--------------------------------------	----

**P**

Personal protective measures following an incident .....	8
Precautions for individuals .....	8
Precautions for the environment .....	8

**S**

Scrapping lithium-ion batteries .....	11
Side access lithium-ion battery	
Commissioning a truck equipped with a lithium-ion battery .....	21
Special lithium-ion safety rules .....	6
Starting a truck equipped with a lithium-ion battery .....	20

**T**

Transporting a lithium-ion battery .....	10
--	----

**U**

Using the on-board charger .....	35
Using the side socket to charge the battery .....	32

**W**

What to do in the event of an accidental spillage .....	8
---	---







